


# VLS 086A RF AC

## ICELINED REFRIGERATOR & ICEPACK FREEZER

This model has a built-in heating element ensuring that the appliance can maintain stable temperatures between +2°C to +8°C in all ambient temperatures, setting a new industry standard beyond the PQS requirement.

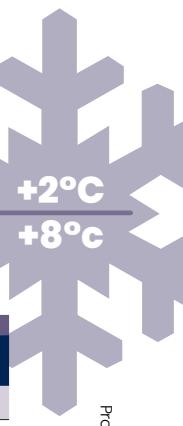

### DIMENSIONS

Height, mm	925
Width, mm	1190
Depth, mm with handle	755
Gross weight, kg (incl. packaging)	160
Net weight, kg	152
Packed dimensions HxWxD, mm	1065x1240x785
Shipping volume m <sup>3</sup>	1,17

### REFRIGERATOR SPECIFICATIONS

Gross volume, L	77,0
Net volume, L	57,625
Temperature range (+43°C AMB)	+2°C to +8°C
Hold-over time, hours (+43°C AMB)	128,33
Refrigerant	R600a
Freeze protection, grade	A
Climate class	T
WHO PQS code	TBA

### FREEZER SPECIFICATIONS

Gross volume, L	50
Water pack storage capacity, L	28 x 0,6
Water pack freezing capacity, kg/24h	2,4
Temperature range (+43°C AMB)	-15° to -25°C
Refrigerant	R290 + R600a

### FEATURES

Storage baskets, no	1
Temperature control	Automatic
Lock + keys	YES
Junction box	YES
Adjustable legs	YES, 10cm
Safety thermostat	YES
Charging port	USB A 5V
EMS level 3 as an option	YES
Industrial grade locking mechanism	YES
Automatic drainage system	YES

### LOADING QUANTITIES

Qty. per 20' / 40' container	22 / 48
------------------------------	---------

### VOLTAGE REGULATION RANGE

220-240V/50/60Hz	110-278V/50/60Hz
100-127V/50/60Hz	82-159V/50/60Hz

Integrated and extended voltage stabilizer as standard in line with PQS E007/VS01-VP.5

Products are subject to change due to enhancements and continuous development. Vestfrost Solutions reserve the right to alter any information, without further notice.

This model comes equipped with our fully integrated remote equipment monitoring system (EMS) as standard. An upgrade to EMS level 3 is available as an option for enhanced monitoring capabilities.