


VLS 086A RF SDD

SOLAR DIRECT DRIVEN TRUE COMBI

The True Combi series can maintain stable temperatures between +2 °C to +8 °C in all ambient temperatures. The included solar panel kit of 4 x 180W, is connected plug & play, directly to the appliance.

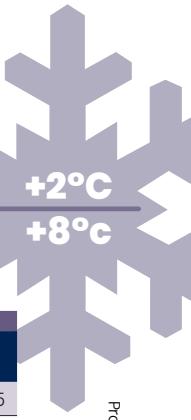

Products are subject to change due to enhancements and continuous development. Vestfrost Solutions reserve the right to alter any information, without further notice.

Updated 07/2026

DIMENSIONS

Height, mm	925
Width, mm	1190
Depth, mm with handle	755
Gross weight, kg (incl. packaging)	160
Net weight, kg	152
Packed dimensions HxWxD, mm	1065x1240x785
Shipping volume m ³	1,17

REFRIGERATOR SPECIFICATIONS

Gross volume, L	77,0
Net volume, L	57,625
Temperature range (+43°C AMB)	+2°C to +8°C
Autonomy, hours (+43°C AMB)	128,33
Refrigerant	R600a
Freeze protection, grade	A
Climate class	T
WHO PQS code	TBA

FREEZER SPECIFICATIONS

Gross volume, L	50
Water pack storage capacity, L	28 x 0,6
Water pack freezing capacity, kg/24h	2,4
Temperature range (+43°C AMB)	-15° to -25°C
Refrigerant	R290 + R600a

FEATURES

Storage baskets, no	1
Temperature control	Automatic
Lock + keys	YES
Junction box	YES
Adjustable legs	YES, 10cm
Safety thermostat	YES
Charging port	USB A 5V
EMS level 3 as an option	YES
Industrial grade locking mechanism	YES
Automatic drainage system	YES

LOADING QUANTITIES

Qty. per 20' / 40' container	22 / 48
*incl. solar panels 4x180W – see our solar panel datasheet	
Solar panels packaging/weight dimensions	170 x 80 x 35 (DxWxH) - 110 kg

This model comes equipped with our fully integrated remote equipment monitoring system (EMS) as standard. An upgrade to EMS level 3 is available as an option for enhanced monitoring capabilities.